
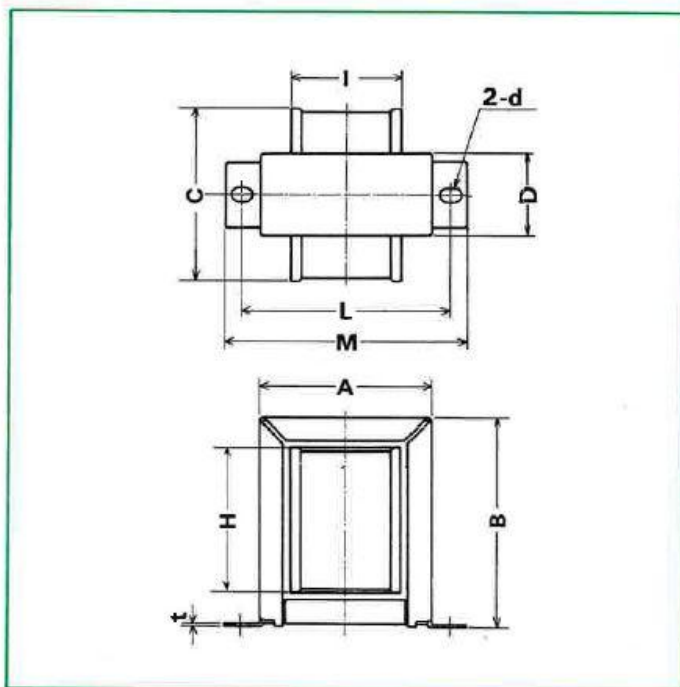


BOV形

- チャンネルフレーム縦形
- 取付寸法 EIAJに準拠
- 端子構造 リード線
ラグ端子
- 保護装置内蔵

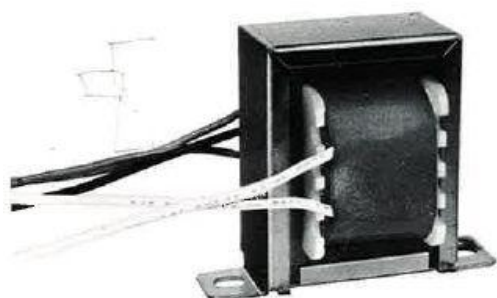

形名	標準出力 V.A	A ^{max}	B ^{max}	C ^{max}	D ^{max}	H ^{max}	I ^{max}	L ^{±1}	M ^{±2}	d ^{±0.3}	t
BOV-4114	3	36	45	41	17	30	25	44	52	3.5×4.5	0.6
BOV-4116	3.5	36	45	43	20	30	25	44	52	3.5×4.5	0.6
BOV-4118	4	36	45	45	22	30	25	44	52	3.5×4.5	0.6
BOV-4816	6	44	53	45	20	33	28	51	59	3.5×4.5	0.6
BOV-4818	7	44	53	47	22	33	28	51	59	3.5×4.5	0.6
BOV-4820	7.5	44	53	49	24	33	28	51	59	3.5×4.5	0.6
BOV-4825	9.5	44	53	54	29	33	28	51	59	3.5×4.5	0.6
BOV-5420	10	49	59	49	24	37	30	60	71	4.5×6.5	0.8
BOV-5422	11	49	59	51	26	37	30	60	71	4.5×6.5	0.8
BOV-5720	12	51	62	52	24	39	33	62	73	4.5×6.5	0.8
BOV-5723	13	51	62	55	27	39	33	62	73	4.5×6.5	0.8
BOV-5725	14	51	62	57	29	39	33	62	73	4.5×6.5	0.8
BOV-6025	16	54	66	57	29	41	34	65	76	4.5×6.5	0.8
BOV-6027	17	54	66	59	31	41	34	65	76	4.5×6.5	0.8
BOV-6030	18	54	66	62	34	41	34	65	76	4.5×6.5	0.8
BOV-6622	20	59	72	56	26	45	37	70	81	4.5×6.5	0.8
BOV-6626	23	59	72	60	30	45	37	70	81	4.5×6.5	0.8
BOV-6630	25	59	72	64	34	45	37	70	81	4.5×6.5	0.8
BOV-6635	28	59	72	69	39	45	37	70	81	4.5×6.5	0.8