


COV形

- C形鉄心箱形
- 小形・軽量
- 端子構造 ラグ端子
リード線

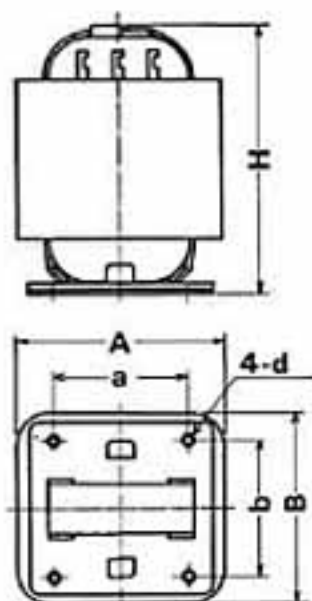

形 名	標準出力 V.A	A ^{mm}	B ^{mm}	H ^{mm}	a ^{±0.3}	b ^{±0.3}	d
COV-6.3	6.3	55	50	65	38	26	M3
COV-8	8	60	55	65	40	26	M3
COV-10	10	60	55	80	40	26	M3
COV-16A	16	60	60	80	42	32	M3
COV-16B	17.5	60	60	90	42	32	M3
COV-20	20	60	65	90	42	36	M4
COV-25	25	70	60	100	48	30	M4
COV-32	32	70	65	100	48	34	M4
COV-40	40	70	70	100	48	40	M4
COV-50	50	85	65	120	64	38	M4
COV-63	63	85	70	120	62	40	M4
COV-80	80	85	80	120	62	46	M4
COV-100	100	85	85	120	62	46	M4

100 VA以上は別途ご相談下さい